

## **10kW<sup>1</sup> STANDBY GENERATOR**



## **BRIGGS & STRATTON®**

## THE SMART CHOICE

For the discerning homeowner that is looking for the smartest, most reliable permanent backup power solution.



## **Designed for Easy Installation & Maintenance**

- Easy to move into installation location with two-wheel dolly
- Approved for installation as close as 18" to a building<sup>2</sup>
- Removable roof and side panels provide better service access to the engine and alternator

## **Compact Size**

- The smallest generator footprint in its class
- Perfect for small properties

## Symphony® II Power Management System

- Customizable to your home's needs
- Automatically balances the power of your home's electrical load including high wattage items like air conditioning units and electric ovens
- Offers whole house power with a more affordable home generator

## Commercial-Grade Briggs & Stratton Vanguard™ Engine

- Powerful V-Twin OHV engine
- Easy conversion between natural gas (NG) and liquid propane vapor (LP) during installation

## **Quality Clean Power**

• Ensures your electronics are safely powered

## **Corrosion Resistant Enclosure & Base**

- Made with automotive grade galvanneal steel to resist rust
- Powder-coated paint for years of protection against chips and abrasions



#### **GENERATOR SET RATINGS** LIQUID PROPANE **NATURAL GAS** LIMITED WARRANTY<sup>4</sup> MODEL **VOLTAGE** PHASE ΗZ BREAKER LP kW LP AMPS NG kW **NG AMPS** PARTS, LABOR, TRAVEL Briggs & Stratton 120/240 60 50 10 41.7 37.5 5 Year 040375

<sup>&</sup>lt;sup>1</sup> This generator is rated in accordance with UL (Underwriters Laboratories) 2200 (stationary engine generator assemblies) and CSA (Canadian Standards Association) standard C22.2 No. 100-04 (motors and generators).

<sup>&</sup>lt;sup>2</sup> The installation manual contains specific instructions related to generator placement in addition to NFPA 37, including the requirement that carbon monoxide detectors be installed and maintained in your home.

<sup>&</sup>lt;sup>3</sup> Warranty details available at www.briggsandstratton.com





## **ENGINE SPECIFICATIONS**

ENGI	NE		LUBR		
Engine Model	Briggs & Stratton Vanguard™		Oil Capacity (oz)		
Engine Model Type Trim Number	359775-0003E1	_	Lubrication System		
Engine Speed (RPM)	3600	_	Recommended Oil		
Engine Fuel	Liquid Propane (LP) or Natural Gas (NG)	_	Low Oil Pressure Sensor		
Engine Cylinder Configuration	OHV		ALTERNATOR SPECS		
Number of Cylinders	2	_	- Manufacturer		
Displacement (cc)			Туре		
	·	_			
Bore & Stroke (in)	2.83 / 2.76	_	-		
Compression Ratio	8.3:1		Insulation		
Governor Type	Mechanical		CONTROLL		
Frequency Regulation	+/- 2.5 Hz	_	— Hour Meter		
	·	_	— LED Digital Display		
Valves	OHV with Hardened Seats	_	- Fault Code Display		
Ignition System	Fixed Timing	-	Weekly Evension		
Starter Motor Rating Voltage	12 Volt		- Weekly Exerciser		
Battery	12 Volt	_	_		

## **OPERATIONS**

FUEL CONSUMPTION <sup>1</sup>					SOUND RATING AT 7 METERS
	50%	Load	<b>100</b> % Load		67 dBA
Liquid Propane	42.8 ft³ / hr	1.19 gal / hr	65.6 ft³ / hr	1.82 gal / hr	Lowest measurement of 12 microphones around generator.
Natural Gas	111 ft³ / hr	_	169 ft³ / hr	_	Sound level measurement at other locations around generator may be different depending upon installation configuration.

<sup>&</sup>lt;sup>1</sup> Fuel consumption rates are estimated based on normal operating conditions. Generator operation may be greatly affected by elevation and the cycling operation of multiple electrical appliances – fuel flow rates may vary depending on these factors.




## **ADDITIONAL INFORMATION**

OTHE	R FEATURES	CERTIFICATION		
Enclosure Material	Galvanneal Steel with Corrosion Resistant Paint	CARB Compliant	Yes	
Overcrank Protection	Yes	NFPA Approved	Yes	
Engine Warm Up (sec)	20 or 50 Automatic Transfer Switch Controlled	cUL Listed to CSA 22.2 NO 100-04	Yes	
Engine Cool Down (min)	1	NEMA Compliant	Yes	
Response Time (sec)	26 or 56 Automatic Transfer Switch Controlled	EPA Certified Fuel System	Yes	
Monitoring Options	Basic Wireless Monitor InfoHub™ Monitor	AVAILABLE ACCESSORIES		
Continuous Battery Charging	Yes	Maintenance Kit	6035	
WEIGHT AI	ND DIMENSIONS	Cold Weather Kit	6030A	
Assembled Weight (lbs)	272	Basic Wireless Monitor	6264	
Overall Dimensions (in)	28 x 24.4 x 35.1	InfoHub	6260	
Packaged Weight (lbs)	330	Remote Status Monitor	6144	



39 x 35.5 x 42

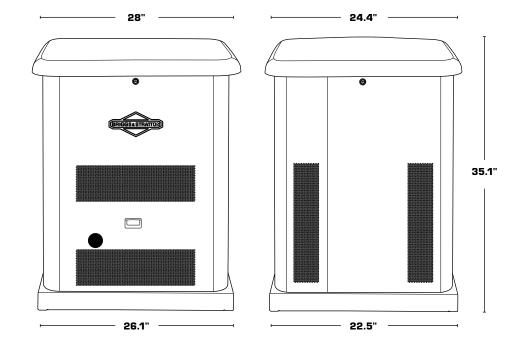



## FUEL PIPE SIZE RECOMMENDATION CHART (CAPACITY IN THOUSANDS OF BTU/HOUR)

	Natural Gas / Inlet Pressure less than 2 PSI / Pressure Drop 1/2" Water Column / Specific Gravity 0.60						
	1/2" pipe capacity	3/4" pipe capacity	1" pipe capacity	1-1/4" pipe capacity	1-1/2" pipe capacity	2" pipe capacity	
20' Length*	118	247	466	957	1,430	2,760	
40' Length*	81	170	320	657	985	1,900	
60' Length*	65	137	257	528	791	1,520	
80' Length*	56	117	220	452	677	1,300	
100' Length*	50	104	195	400	600	1.160	

	Liquid Propane / Inlet Pressure 11" Water Column / Pressure Drop 1/2" Water Column / Specific Gravity 1.50					
	1/2" pipe capacity	3/4" pipe capacity	1" pipe capacity	1-1/4" pipe capacity	1-1/2" pipe capacity	2" pipe capacity
20' Length*	200	418	788	1,617	2,423	4,666
40' Length*	137	287	541	1,111	1,665	3,207
60' Length*	110	231	435	892	1,337	2,575
80' Length*	101	212	400	821	1,230	2,370
100' Length*	101	212	400	821	1,230	2,370

<sup>\*</sup>Total length of piping from outlet of regulator to appliance furthest away.

## **ADDITIONAL INFORMATION**

TRANSFER SWITCH SPECIFICATIONS					
Prewired 16 Circuit	100 AMP	Model #071076			
Standard 16 Circuit	100 AMP	Model # 071047			
Symphony® II	100 AMP Model # 07107				
Symphony® II	150 AMP	Model # 071070			
Symphony® II	200 AMP	Model # 071068			
Voltage Rating	120/240				
	Select Circuit: 16				
Number of Protected Circuits	Symphony® II: Whole House				
UL Approved	Yes				
NEMA 3R Rated	Yes				

**Disclaimer:** Not for Prime Power or use where standby systems are legally required, for serious life safety or health hazards, or where lack of power hampers rescue of fire-fighting operations.

### **BRIGGS&STRATTON**

POST OFFICE BOX 702 MILWAUKEE, WI 53201 USA

Copyright @2016. All rights reserved. BS1007-H  $\,$  – 11/16  $\,$ 

# **SUPPORT EVERY STEP OF THE WAY**

NEED HELP? Just call 800-759-2744

Our technical support team is trained to answer questions on our generators, transfer switches and accessories.

CALL TODAY FOR A FREE IN-HOME ESTIMATE! 800-743-4115