



100kW¹ STANDBY GENERATOR

208-480 V NATURAL GAS



BRIGGS & STRATTON® THE SMART CHOICE

For the discerning business owner that is looking for the smartest, most reliable permanent backup power solution.



Standard Features

- cUL 2200 Listed
- Rugged seven-gauge steel base and protected by an enclosure made from Galvannealed Steel
- Generators are powered by EPA Certified 1800 RPM industrial grade PSI engine
- Sound attenuated enclosures for reduced noise output
- Maringo 6A Battery Charger
- DSE 7310 MKII Controller



GENERATOR SET RATINGS

BRIGGS & STRATTON MODEL	ALTERNATOR MODEL	VOLTAGE	PHASE	HZ	NATURAL GAS 125°C STANDBY RATING		STANDARD WARRANTY ²
					kW / kVA	AMPS	
080011	ECP34-1L/4	120/208	3	60	100 / 125	347	3 Year
080012	ECP34-1L/4	120/240	3	60	100 / 125	301	
080013	ECP34-1L/4	277/480	3	60	100 / 125	150	

¹ This generator is rated in accordance with UL (Underwriters Laboratories) 2200 (stationary engine generator assemblies) and CSA (Canadian Standards Association) standard C22.2 No. 100-14 (motors and generators). All units are rated at a 0.8 power factor.

² Warranty details available at www.briggsandstratton.com

ENGINE SPECIFICATIONS

ENGINE	
Manufacturer	PSI
Aspiration	Turbocharged
Model Type	5.7, Industrial Powertrain, 4-Cycle
Speed (RPM)	1800
Cylinder Arrangement	V8
Displacement (L / ci)	5.7 (350)
Bore & Stroke (mm / in)	101.6 x 88.4 (4.00 x 3.48)
Compression Ratio	9:4:1
Governor Type	Electronic
Frequency Regulation Steady State	.5%
Frequency Regulation No-load to Full-load	Isochronous
Air Filter Type	Dry
LUBRICATION SYSTEM	
Type	Full Pressure
Oil Capacity (L / qt)	4.7 / 5.0
Oil Filter (Quantity / Type)	1, Cartridge
COOLING SYSTEM	
Heat Rejected to Cooling Water at Rated Load (kcal/sec / Btu/min)	17.2 / 4100
Water Pump Type	Centrifugal

ELECTRICAL SYSTEM	
Ignition System	HVS Distributor
Battery Quantity	1
Battery Voltage (VDC)	12
Battery CCA (A)	630
Battery Charging Alternator	
Ground (Negative/Positive)	Negative
Voltage (VDC)	12
Amperage (A)	70
Starter Motor Voltage (VDC)	12

EXHAUST SYSTEM	
Exhaust Manifold Type	Dry
Exhaust Flow at Rated Load (m³/min / cfm)	24 / 846
Exhaust Temperature at Rated Load (°C / °F)	732 / 1350
Maximum Allowable Back Pressure, (kPa / in Hg)	10.2 / 3

FUEL SYSTEM	
Fuel Type	Natural Gas
Fuel Supply Line Inlet	1 1/4 NPT
Recommended Fuel, Lower Heating Value Minimum (MJ/m³ / Btu/ft³)	33.2 / 890
Fuel Supply Pressure (mbar / in H₂O)	17-28 / 7-11

FUEL CONSUMPTION			
	Full Load	1/2 Load	No Load
BTU/hr	1,390,000	880,000	370,000
ft³/hr	1390	880	370
m³/hr	39.3	24.9	10.4

ENGINE OUTPUT DERATINGS	
Rated Temp	104°F / 25°C
Temperature Derate	1% for each 10°F (5.6°C) above rated temp
Altitude Derate	2.5% for each 305m (1000ft) above rated altitude

SOUND RATING AT 7 METERS, LOWEST SIDE	
Full Load	80 dB(A)

AIR INDUCTION SYSTEM	
Combustion Air (m³/min / cfm)	7.42 / 262

¹ This generator is rated in accordance with UL (Underwriters Laboratories) 2200 (stationary engine generator assemblies) and CSA (Canadian Standards Association) standard C22.2 No. 100-14 (motors and generators). All units are rated at a 0.8 power factor.

ADDITIONAL STANDARD FEATURES
AVAILABLE ACCESSORIES

6463	Battery Charger, NFPA 110 Compliant, DSE 9461-02
6468	Remote Annunciator Kit NFPA 110 Compliant, DSE 2548-01
6465	Remote Annunciator, DSE 2548-01
6466	Remote Display, DSE 2510-32
6464	Communication Interface, DSE 890-01
6360	Emergency Stop Switch, NFPA 110 Compliant, NEMA 4X
6361	Emergency Stop Switch, NFPA 110 Compliant, With Cover
6428	Controller Communication Cable, USB-A to USB-B
6335	Battery Cable Lockout, NFPA 110 Compliant
6350	Engine Communication Cable
6469	Silencer, Super Critical Grade
6470	Silencer, Hospital Grade

OTHER FEATURES

- Alternator Protection
- Battery Rack and Cables
- Electronic, Isochronous Governor
- Gas Fuel System (includes fuel mixer, electronic secondary gas regulator, gas solenoid valve, and flexible fuel line between the engine and the skid-mounted fuel system components)
- Integral Vibration Isolation
- Local Emergency Stop Switch
- Oil Drain Extension
- Operation and Installation Literature²
- Steel Sound Enclosure

SOUND ENCLOSURES

- Sound level ratings with no load: 80 dB(A)*
- Sound attenuating enclosure uses acoustic insulation that meets UL 94 HF1 flammability classification and repels moisture absorption
- Lockable, stainless steel door latches
- Critical grade silencer
- Steel enclosure standard with hinged doors

WEIGHT & DIMENSIONS

Assembled Weight (lbs)	4125
Overall Dimensions (in)	120 x 52 x 86
Packaged Weight (lbs)	4125
Packaged Dimensions (in)	127 x 60 x 92


CONTROLLER FEATURES

- Heated display option
- True 3 Phase generator sensing
- Power monitoring (kW, kVA, kVAR)
- Remote communications (RS232 & RS485) provides secure and simple off site monitoring. All ports are continuously active
- Configurable inputs/outputs (9/8)
- CAN sensing
- Configurable display languages
- Power save mode
- Integral PLC editor
- Flexible sender inputs
- DSE Configuration Suite PC Software
- Configurable event log (250)
- Load switching, load shedding & dummy load outputs

¹ This generator is rated in accordance with UL (Underwriters Laboratories) 2200 (stationary engine generator assemblies) and CSA (Canadian Standards Association) standard C22.2 No. 100-14 (motors and generators). All units are rated at a 0.8 power factor.

² The installation manual contains specific instructions related to generator placement in addition to NFPA 37, including the requirement that carbon monoxide detectors be installed and maintained in your business and home.

* Sound measured at 7M. Sound levels at various points around generator may be higher depending on installation parameters.

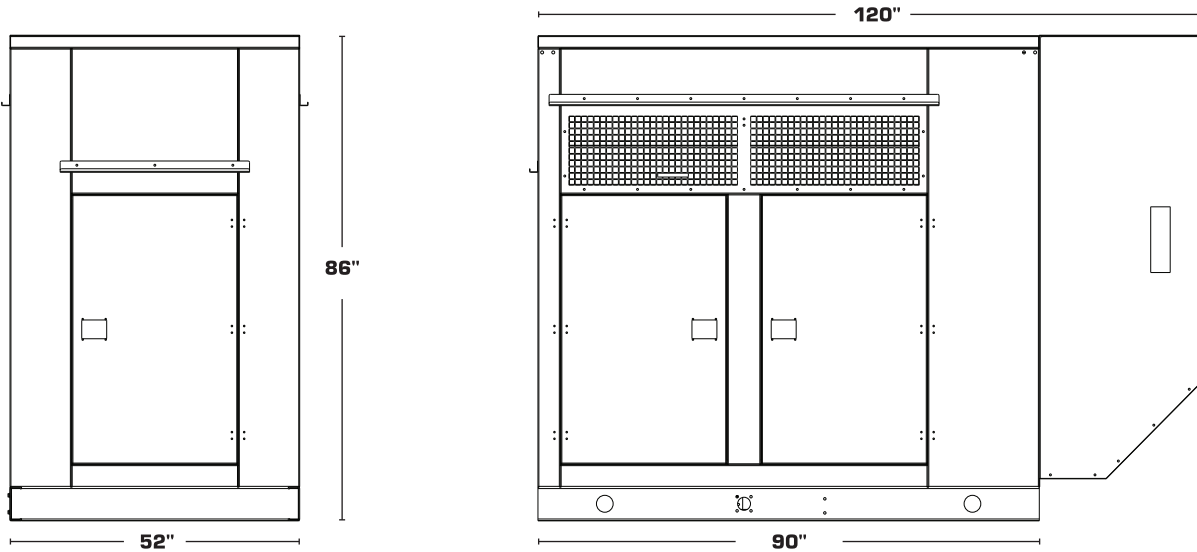

ALTERNATOR SPECIFICATIONS

Manufacturer	Mecc Alte
Type	4-Pole, Rotating-Field
Exciter Type	Brushless, Auxiliary Winding
Voltage Regulator	Digital, Volts/Hz
Insulation Rating	Class H
Designed Temperature Rise Limit	125°C
Bearing (Quantity / Type)	1 / Sealed
Coupling	Flexible Disk
Amortisseur Windings	Full
Voltage Regulation, NL to FL	+/- 1.0%
One Step Load Acceptance	100% of Rating
Total Harmonic Distortion	< 3%

- 12 - Wire reconnectable starter.
- Windings are insulated using the latest vacuum pressure impregnation technologies.
- 2/3rds winding pitch to eliminate triplen harmonics with the voltage waveform.
- Fully programmable digital AVR with alarm memory.
- Manufactured according to the following standards: UL1004, NEMA MG1, IEC 60034-1.
- > 300% sustained short circuit current for up to 20 seconds.

SUPPORT EVERY STEP OF THE WAY

NEED HELP? Just call 800-759-2744
Our technical support team is trained to answer questions on our generators, transfer switches and accessories.

FOR MORE INFORMATION PLEASE CONTACT YOUR LOCAL BRIGGS & STRATTON DEALER.

To find a dealer visit www.briggsandstratton.com

Disclaimer: Not for Prime Power or use where standby systems are legally required, for serious life safety or health hazards, or where lack of power hampers rescue of fire-fighting operations.

BRIGGS & STRATTON CORP.

POST OFFICE BOX 702
MILWAUKEE, WI 53201 USA
Copyright ©2016. All rights reserved. BS1066 – 12/16

¹ This generator is rated in accordance with UL (Underwriters Laboratories) 2200 (stationary engine generator assemblies) and CSA (Canadian Standards Association) standard C22.2 No. 100-14 (motors and generators). All units are rated at a 0.8 power factor.

Briggs & Stratton Corp. reserves the right to make changes in specifications and features shown herein, or discontinue the product described at any time without notice or obligation.